TRAILER MOUNTED BOOM LIFT

DIMENSIONS	MHP13AT
Max.height	12.9m
Max. platform height (A)	10.9m
Horizontal outreach	6.4m
Platform size	1.15m x 0.7m
Overall width (outriggers extended)	4.2m
Overall width (outriggers retracted) (B)	1.6m
Overall length (C)	4.9m
Transport length (D)	2.0m

PERFORMANCE	
Platform capacity	215kg
Max. wind speed	12.5m/s
Levelling	auto
Turntable rotation	540° non-continuous
Tyres	185 R14 102/100P
Brakes	Hydraulic over-run non free reversing
Insulation rating	Nil
Trailer tongue weight	80kg


POWER

Power source


WEIGHT

Gross weight	
--------------	--

WORKING ENVELOPE

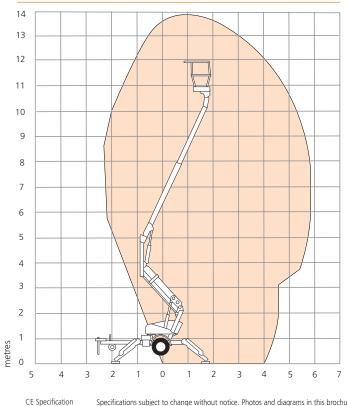

MHP13AT



STANDARD FEATURES

- Heavy duty tow coupling
- Hydraulic stabilisers
- Two man steel platform
- Two person capacity
- Heavy duty jockey wheel
- Hydraulic disc brakes
- Reliable petrol engine
- Outrigger boom safety interlocks
- Platform foot switch
- Spare wheel

Honda petrol

1,460kg

- LED taillights
- Lifting lugs
- Automatic self-levelling stabilisers
- Rotating basket mount
- Basket overload



1300 966 088 betterrentals.com.au

CE Specification Specifications subject to change without notice. Photos and diagrams in this brochure are for promotional purposes only. Refer to appropriate Snorkel operators manual for detailed instructions on the proper use and maintenance.