


Slab Scissor Lift - 8m metre electric.

DIMENSIONS	S2646E
Max. working height	10.0m
Max. platform height (A)	8.0m
Platform size (stowed)	1.14m x 2.38m
Platform size (extended)	1.14m x 3.30m
Deck extension length (B)	0.91m
Overall width (C)	1.16m
Stowed length (D)	2.54m
Stowed height (E)	2.36m
Stowed height (guardrails folded)	1.67m
Wheelbase	1.9m
Ground clearance (stowed)	101mm
Ground clearance (elevated)	25mm

PERFORMANCE	
Platform capacity (SWL)	454kg
Max. operating wind speed (1 person on platform)	12.5m/s
Max. drive height	7.90m
Max. drive speed (elevated)	0.8km/h
Max. drive speed (stowed)	3.2km/h
Raise/lower time	35/60sec
Gradeability	25%
Inside turning radius	0.25m
Outside turning radius	2.5m
Tyres	38.1cm x 12.7cm non-marking solid rubber
Controls	one-hand proportional joystick
Drive system	dual front wheel hydraulic motors

POWER	
Power source	24V 4hp DC electric motor 4 x 6V 240 Ah batteries

WEIGHT	
Gross weight	2,359kg

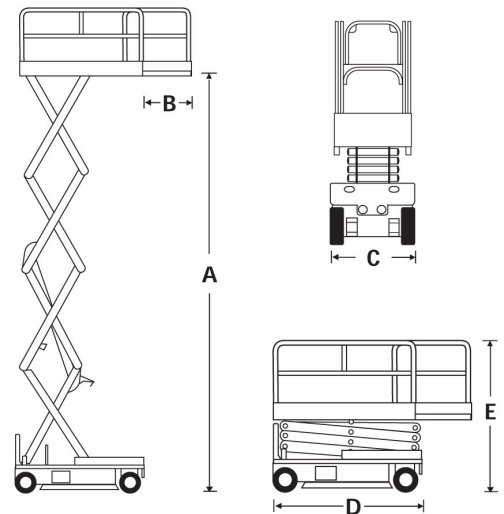


STANDARD FEATURES

- Proportional controls
- 0.9m extension deck
- Tilt alarm
- Swing-out service trays
- Approved for outdoor use with one person on platform (S2646E/S3246E)
- Power line to platform (no sockets)
- Horn
- Hour meter
- CE approved

OPTIONS

- Special paint colours
- Flashing amber beacon
- Airline to platform
- Dual lanyard anchorage points

TURNING RADIUS

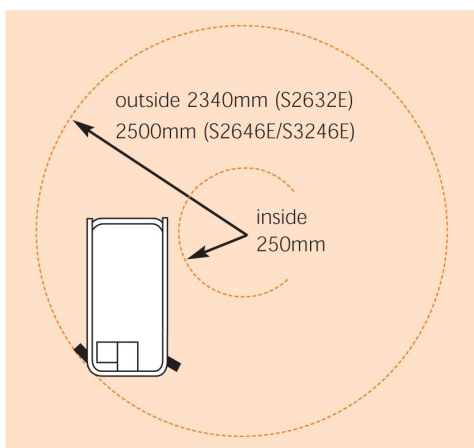

Cranbourne	03 59966 088
Pakenham	03 5941 2299
Mornington	03 5977 0770
Ferntree Gully	03 0759 8444
Carrum Downs	03 5973 4403

On Time Delivery Guarantee:
It's on time - or the delivery is free.

betterrentals.com.au